


NO.	Bushing	L
1	DT10N1250	215
2	DT10N1250 DT20N1250	265
3	DT20N1250 DT30N1250	340
4	DT30N1250	440
5	DT33/250/990	480
6	DT33/250/1260	495
7	DT33/250/1320	530

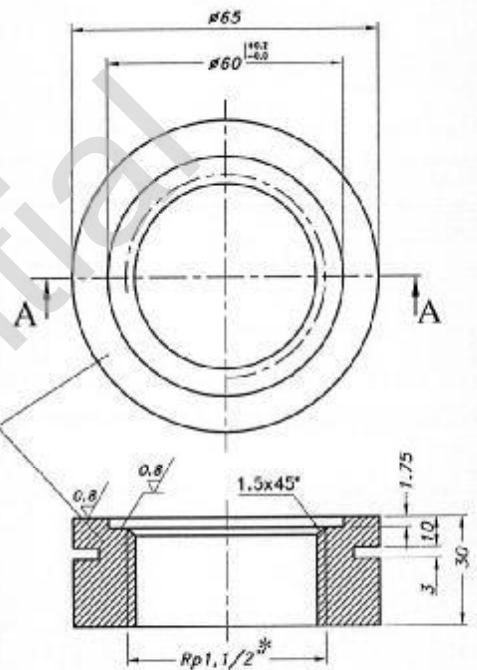

with protection relay
without protection relay

* عملیات رزوه زنی بعد از جوشکاری فلانش به نوله و به طور همزمان انجام شود.
Semifinished (part 1): Forging
Uncertain tolerances according to DIN ISO 2768-m

1	1	6	Flat washer	ND 0J 06 009			
-	1	5	Fastening cap	St.37			
		-	DIN 1691(DIN EN 1561)				
1	1	4	Oil level sight glass	TUN 900101			
		-					
1	1	3	Socket	ND 0B 03 018			
		-					
1	1	2	Pipe	St.33	φ48.3x3.25xL - (1,1/2")		
		-	DIN 2440				
1	1	1	Flange	St.37-2	φ85*φ44*30		
		-					
Qt.	Item No.	Description	Identity No.	Material	Dimension	Mass.	
	Index			Standard		Kg	
Index	Mod.No.	Date	Modifications	Signature	Title: Filling Pipe (R 1,1/2") (for oil sight glass with protection relay or just oil sight glass installing)		
					Ordered by:		
Tolerance:		Group:	Applied by:	Drawing Identification:			
Scale: --			Z.Aejadi	I T R I - - R 1 1			
			Check by:	Drawing No.:			
			A.Karamzadeh	N D 0 B 0 3 - 0 1 7 -			
			Approved by:	Date:	Page.Count No.:	Page No.:	
			F.Joulaei	1399/06/16	1	1-	



شرکت ترانسفورماتور توزیع زنجان

ZANCAN DISTRIBUTION TRANSFORMER CO.